


LAT39TBUK

| SPECIFICATION | LAT-39-TB | LAT-39-TB |
|----------------------------|-----------|-----------|
| Working height | 14.3 m | 14.3 m |
| Platform height | 12.3 m | 12.3 m |
| Max. working outreach | 7.3 m | 6.8 m |
| Max. bucket capacity | 200 kg | 250 kg |
| Flyboom | - | - |
| Minimum GVW of the vehicle | 3500 kg | 3500 kg |

* Depending on vehicle


STANDARD

- 1 set A-Frame + 1 set radial Outriggers
- PTO driven hydr. Pump
- TMS: Topmounted subframe
- OBI: Outrigger boom interlock
- ES: Emergency pump System
- 2 Man Euro bucket
- Bucket center stowe without platform
- RLC: Remote Handheld Lower Control
- 1 KV insulation

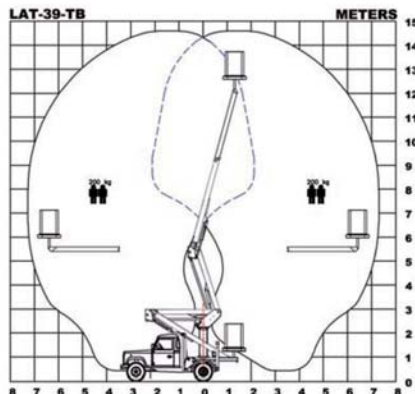

OPTIONS

- VP: 230 V connection to platform
- AEP: Access Environmental Powerpack
- SJC: Single Joystick prop. Control

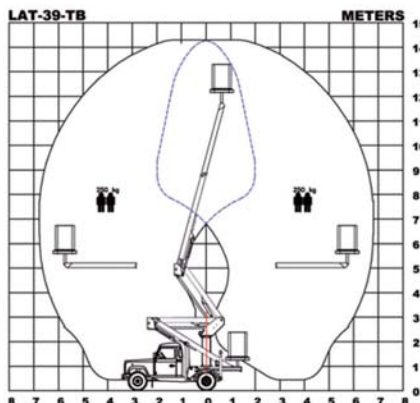

NOTE



LAT-39-TB_Landrover/C/2010-04/EN