
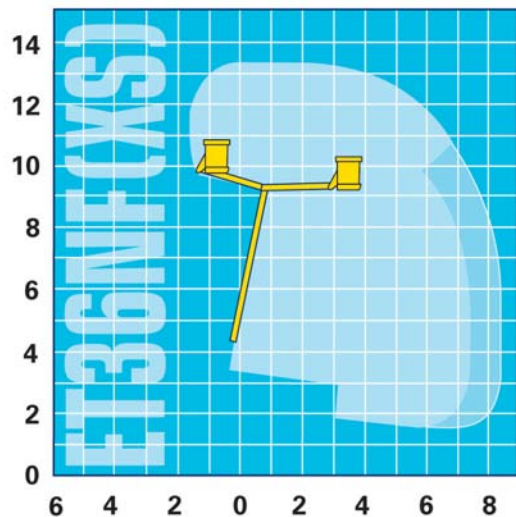
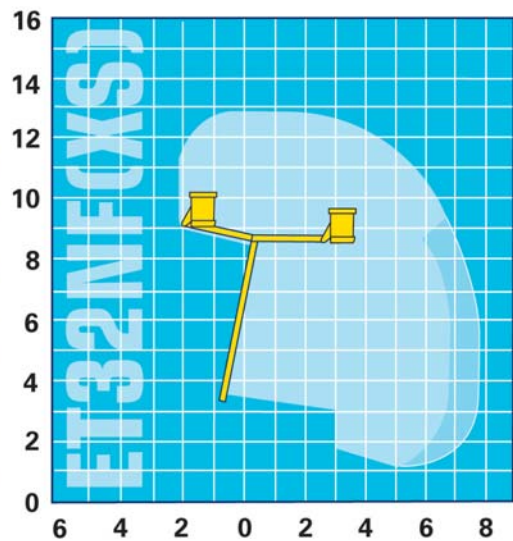


Eurotel ET32NFXS

specifications

	ET32NFXS	ET36NF	ET36NFXS
max. working height	12.2m	13.2m	13.2m
max. platform height	10.2m	11.2m	11.2m
horizontal outreach@200kg SWL	7.1m	7.3m	7.3m
horizontal outreach@120kg SWL	8.2m	8.4m	8.4m
fly boom	110°standard /180° optional		
non continuous rotation	>360°	>360°	>360°
boom travel	-7° to 80°	-7° to 80°	-7° to 80°
GVW	3.5t	3.5t	3.5t

Please note that SWL, material handling capabilities, outreach and working height vary according to specification of platform and base vehicle. Above figures are intended as best guide only. Versalift is certified to ISO 9001: 2000 by TUV UK quality assurance Ltd; number GB00468.

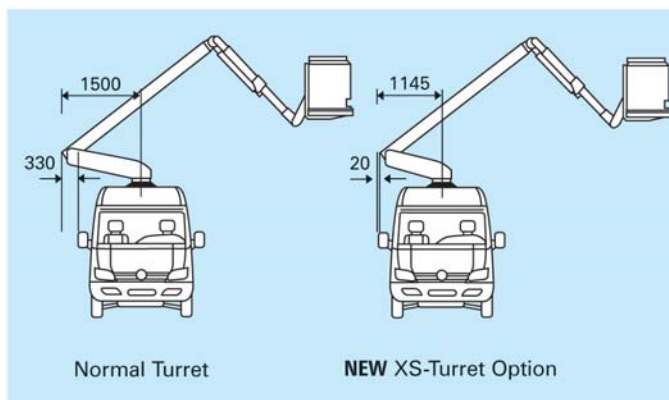

All dimensions in metres

- Reach of ET32NF(XS) • ET36NF
ET36NFXS (1 man)
- Reach of ET32NF • ET36NF

